



TELEHANDLERS



MAIN PARAMETER

Item	XT3207K	XT3510K	XT3514K	XT3707K
Measurements				
a.Overall length (without fork)	6200mm	6075mm	6074mm	5100mm
b.Overall width	2380mm	2410mm	2350mm	2380mm
c.Overall height	2580mm	2370mm	2450mm	2580mm
Fork length	1000mm	1200mm	1200mm	1200mm
Fork width	122mm	122mm	122mm	150mm
Fork height	45mm	50mm	50mm	50mm
d.Wheelbase	2850mm	3490mm	3490mm	2850mm
e.Ground clearance	330mm	400mm	400mm	360mm
Turning radius(inside/outside)	3900mm	4100mm	4100mm	3900mm
Productivity				
Max. lift capacity	3200kg	3500kg	3500kg	3700kg
Max.lifting height	7m	9.5m	13.4m	7m
Max.outreach	3.9m	5.5m	9.3m	3.9m
Max.travel speed	32km/h	30km/h	32km/h	32km/h
Max.height lifting capacity	2500kg	3500kg	2000kg	2700kg
Max.amplitude lifting capacity	1350kg	1500kg	500kg	1500kg
Unladen lifting/owering speed	9.5s/8s	9.5s/8s	13s/9s	8s/7s
Unladen Extension/retraction speed	9.5s/7.5s	12s/12s	17s/14s	7s/7s
Gradeability(overload)	35%	35%	35%	35%
Technical Data				
Tilting angle of fork(tip up/tip down)	-14°/136°	-14°/112°	-14°/112°	-14°/136°
Hydraulic system pressure	280bar	280bar	280bar	280bar
Hydraulic oil tank volume	150L	135L	135L	140L
Fuel tank volume	135L	130L	130L	140L
Hollow tire	400/70-R24	400/80-R24	400/80-R24	400/70-R24
Power source				
Make/Model	Deutz/BF4M2012	Deutz/BF4M2012	Deutz/BF4M2012	Deutz/BF4M2012
Emission standard	CN Stage 3	CN Stage 3	CN Stage 3	CN Stage 3
Rated power	72kW/2200 rpm	72kW/2200 rpm	72kW/2200 rpm	72kW/2200 rpm
Max torque	375N·m/1600 rpm	375N·m/1600 rpm	375N·m/1600 rpm	375N·m/1600 rpm
Transmission				
Make/model	Comer Industries/C128	Comer Industries/C128	Comer Industries/C128	Comer Industries/C128
No. of gear	/	/	/	/
Weight				
Total vehicle cube weight(with forks)	8600 kg (Fuel tank full)	10000kg	10500kg	8100kg

The print does not belong to the contract, nor a part of the vehicle purchase contract.
We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice.
Pictures are for reference only, and the specific product shall depend on the real product.

MAIN PARAMETER

Item	XT4014K	XT4207K	XT4514K
Measurements			
a.Overall length (without fork)	6074mm	5100mm	6255mm
b.Overall width	23500mm	2380mm	2350mm
c.Overall height	2540mm	2580mm	2540mm
Fork length	1200mm	1200mm	1200mm
Fork width	150mm	150mm	150mm
Fork height	50mm	50mm	50mm
d.Wheelbase	3490mm	2850mm	3490mm
e.Ground clearance	400mm	360mm	400mm
Turning radius(inside/outside)	4100mm	3862mm	4100mm
Productivity			
Max. lift capacity	4000kg	4200kg	4500kg
Max.lifting height	13.4m	7m	13.2m
Max.outreach	9.3m	3.9m	9.3m
Max.travel speed	32km/h	32km/h	32km/h
Max.height lifting capacity	2200kg	2800kg	3000kg
Max.amplitude lifting capacity	600kg	1600kg	1200kg
Unladen lifting/owering speed	13s/9s	8s/7s	14s/11s
Unladen Extension/retraction speed	17s/14s	7s/7s	18s/15s
Gradeability(overload)	35%	35%	35%
Technical Data			
Tilting angle of fork(tip up/tip down)	-14°/112°	-14°/136°	-14°/112°
Hydraulic system pressure	280bar	280L	300bar
Hydraulic oil tank volume	135L	140L	160L
Fuel tank volume	130L	140L	140L
Hollow tire	14	460/70-R24	14
Power source			
Make/Model	Deutz/BF4M2012	Deutz/BF4M2012	Cummins/QSF3,8 Deutz/BF4M2012
Emission standard	CN Stage 3	CN Stage 3	CN Stage 3 CN Stage 3
Rated power	72kW/2200 rpm	72kW/2200 rpm	97 kW/2200 rpm 72kW/2200 rpm
Max torque	375N·m/1600 rpm	375N·m/1600 rpm	488 N·m/1600 rpm 375N·m/1600 rpm
Transmission			
Make/model	Comer Industries/C128	Comer Industries/C128	Comer Industries/C128
No. of gear	/	/	/
Weight			
Total vehicle cube weight(with forks)	11200kg	8600kg	12000kg

The print does not belong to the contract, nor a part of the vehicle purchase contract.
We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice.
Pictures are for reference only, and the specific product shall depend on the real product.

MAIN PARAMETER

Item	XT4517K	XT5017K
Measurements		
a.Overall length (without fork)	6250mm	6120mm
b.Overall width	2680mm	2560mm
c.Overall height	2600mm	2540mm
Fork length	1200mm	1200mm
Fork width	150mm	150mm
Fork height	50mm	60mm
d.Wheelbase	3490mm	3490mm
e.Ground clearance	550mm	450mm
Turning radius(inside/outside)	4300mm	4300mm
Productivity		
Max. lift capacity	4500kg	5000kg
Max.lifting height	17.1m	17.1m
Max.outreach	13.1m	13.15m
Max.travel speed	32km/h	32km/h
Max.height lifting capacity	2000kg	2267kg
Max.amplitude lifting capacity	1360kg	1361kg
Unladen lifting/owering speed	13s/11s	13s/11s
Unladen Extension/retraction speed	18s/15s	18s/15s
Gradeability(overload)	45%	45%
Technical Data		
Tilting angle of fork(tip up/tip down)	-14°/111°	-14°/111°
Hydraulic system pressure	280bar	280bar
Hydraulic oil tank volume	160L	160L
Fuel tank volume	140L	140L
Hollow tire	14	14
Power source		
Make/Model	Cummins/QSF3.8 Cummins/Tier 4f	Cummins/QSF3.8 YCF36130-T483
Emission standard	CN Stage 3 /	CN Stage 3 CN Stage 4
Rated power	97Kw/2200 rpm 97Kw/2200 rpm	96 kW/2200 rpm
Max torque	488N·m/1600 rpm 488N·m/1600 rpm	500 N·m/1600 rpm
Transmission		
Make/model	America Dana/1120	America Dana/1120
No. of gear	/	/
Weight		
Total vehicle cube weight(with forks)	15000kg	15000kg

The print does not belong to the contract, nor a part of the vehicle purchase contract.
We reserve the right to revise the product model, parameters, configuration based on the continuous improvment requirements of the product, without prior notice.
Pictures are for reference only, and the specific product shall depend on the real product.

MAIN PARAMETER

Item	XT5517K	XT8010K	XT12010K
Measurements			
a.Overall length (without fork)	6120mm	6120mm	6330mm
b.Overall width	2650mm	2560mm	2500mm
c.Overall height	2540mm	2530mm	3000mm
Fork length	1200mm	1200mm	1200mm
Fork width	150mm	175mm	180mm
Fork height	60mm	70mm	70mm
d.Wheelbase	3490mm	3800mm	3600mm
e.Ground clearance	450mm	440mm	440mm
Turning radius(inside/outside)	4300mm	4300mm	4800mm
Productivity			
Max. lift capacity	5500kg	8000kg	12000kg
Max.lifting height	17.1m	9.4m	9.8m
Max.outreach	13.15m	5.2m	5.3m
Max.travel speed	32km/h	32km/h	28km/h
Max.height lifting capacity	2267kg	4500kg	7000kg
Max.amplitude lifting capacity	1587kg	2500kg	3600kg
Unladen lifting/owering speed	18s/14s	25s/18s	22s/18s
Unladen Extension/retraction speed	23s/22s	28s/18s	16s/9s
Gradeability(overload)	45%	35%	33%
Technical Data			
Tilting angle of fork(tip up/tip down)	-14°/111°	-14°/112°	-18°/117°
Hydraulic system pressure	280bar	280bar	280bar
Hydraulic oil tank volume	160L	160L	290L
Fuel tank volume	140L	140L	340L
Hollow tire	14	14	14
Power source			
Make/Model	Cummins/QSF3.8 Yuchai/YCF36130-T483	Cummins/QSF3.8	Cummins/QSB4.5
Emission standard	CN Stage 3 CN Stage 4	CN Stage 3	CN Stage 3 EU Stage 4
Rated power	96 kW/2200 rpm	96 kW/2200 rpm	123kW/2200 rpm 129kW/2200 rpm
Max torque	500 N·m/1600 rpm	500 N·m/1600 rpm	624N·m/1500 rpm 780N·m/1500 rpm
Transmission			
Make/model	America Dana/1120	America Dana/1120	America Dana/358
No. of gear	/	/	/
Weight			
Total vehicle cube weight(with forks)	15400kg	14100kg	18000kg

The print does not belong to the contract, nor a part of the vehicle purchase contract.
We reserve the right to revise the product model, parameters, configuration based on the continuous improvment requirements of the product, without prior notice.
Pictures are for reference only, and the specific product shall depend on the real product.


MAIN PARAMETER

Item	XT18010K	XT23010K
Measurements		
a.Overall length (without fork)	6500mm	8800mm
b.Overall width	2500mm	2850mm
c.Overall height	3300mm	3000mm
Fork length	1200mm	1800mm
Fork width	200mm	250mm
Fork height	80mm	100mm
d.Wheelbase	3750mm	3900mm
e.Ground clearance	440mm	490mm
Turning radius(inside/outside)	4800mm	5500mm
Productivity		
Max. lift capacity	18000kg	23000kg
Max.lifting height	9.8m	9.65m
Max.outreach	5.5m	5.8m
Max.travel speed	25km/h	25km/h
Max.height lifting capacity	11000kg	15000kg
Max.amplitude lifting capacity	4500kg	7000kg
Unladen lifting/owering speed	33s/20s	33s/20s
Unladen Extension/retraction speed	22s/20s	14s/11s
Gradeability(overload)	45%	30%
Technical Data		
Tilting angle of fork(tip up/tip down)	-12°/105°	-12°/105°
Hydraulic system pressure	350bar	350bar
Hydraulic oil tank volume	320L	280L
Fuel tank volume	300L	310L
Hollow tire	16	18,00 R25
Power source		
Make/Model	Cummins/QSB4,5	QSB6,7-C190-30
Emission standard	CN Stage 3 CN Stage 4	/
Rated power	123 kW/2200 rpm 125 kW/2200 rpm	142 kW/2200 rpm
Max torque	624 N·m/1500 rpm 670 N·m/1500 rpm	931 N·m/1400 rpm
Transmission		
Make/model	America Dana/368	America Dana/10169773
No. of gear	/	/
Weight		
Total vehicle cube weight(with forks)	24500kg	30200kg


The print does not belong to the contract, nor a part of the vehicle purchase contract.
We reserve the right to revise the product model, parameters, configuration based on the continuous improvment requirements of the product, without prior notice.
Pictures are for reference only, and the specific product shall depend on the real product.

RANGE OF MOTION WITH STABILIZERS UP


XT3207K

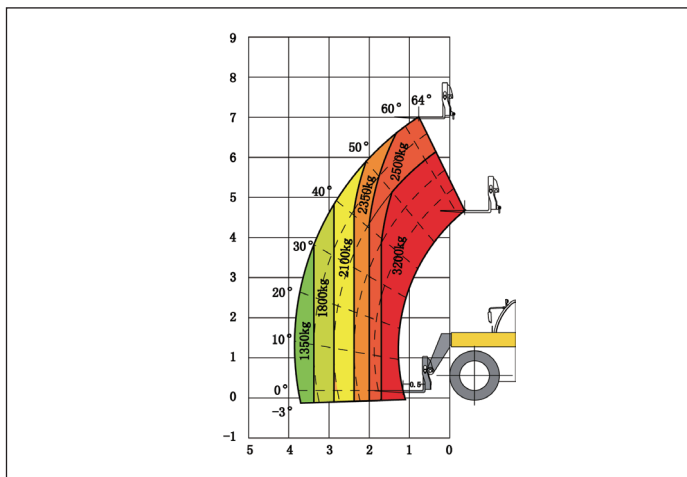


XT3510K

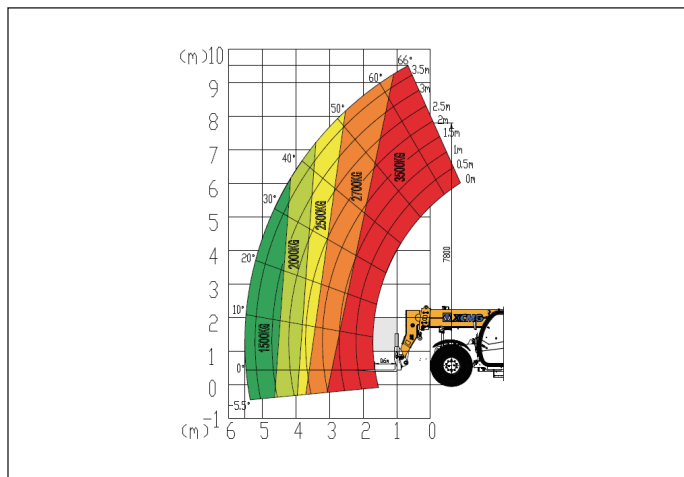


XT3514K

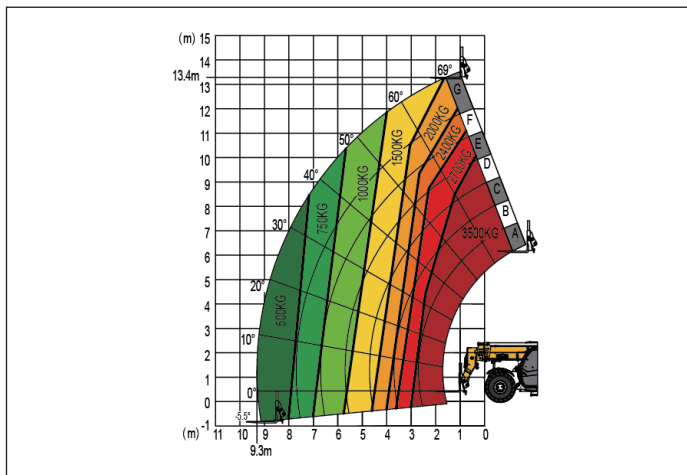


XT3707K

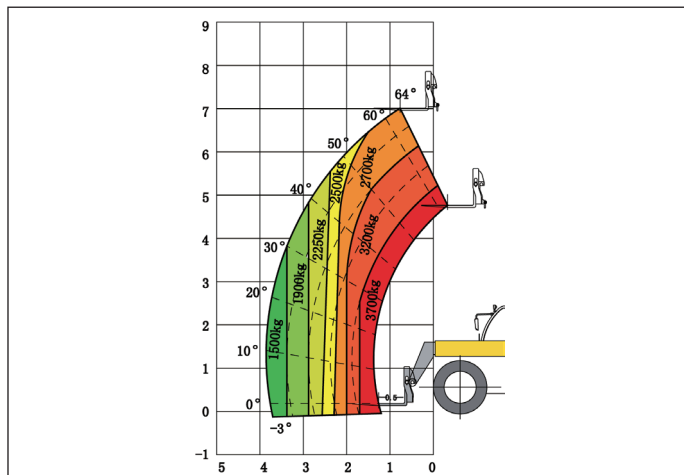

XT4014K

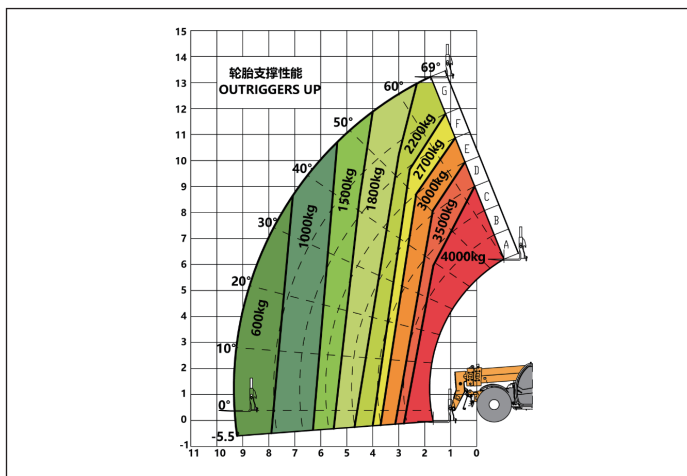

XT4207K

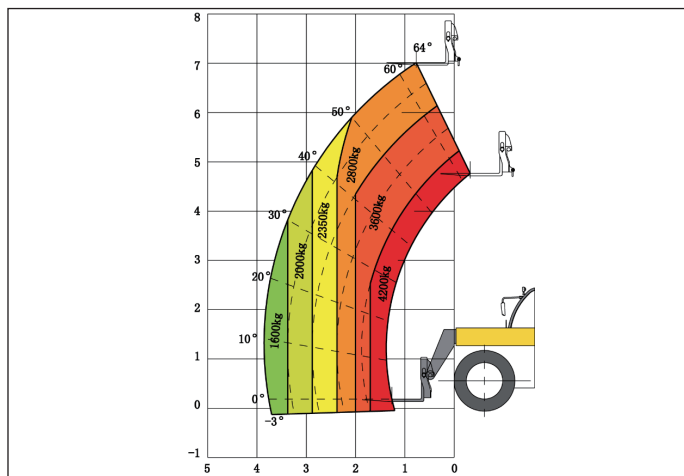


The print does not belong to the contract, nor a part of the vehicle purchase contract.

We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice.


Pictures are for reference only, and the specific product shall depend on the real product.

RANGE OF MOTION WITH STABILIZERS UP


XT4514K

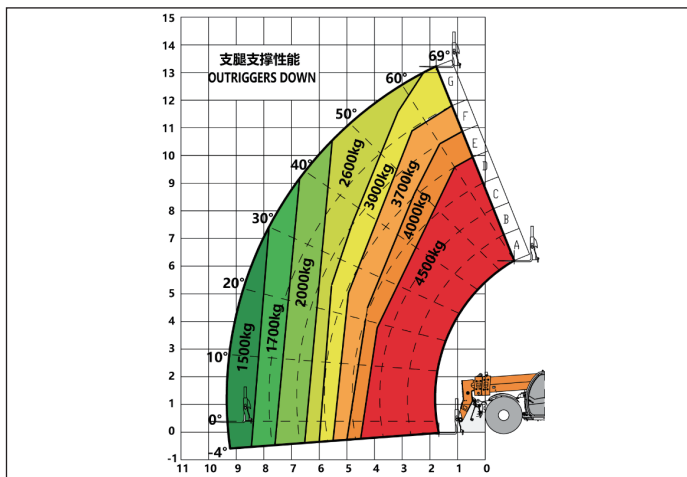


XT4517K

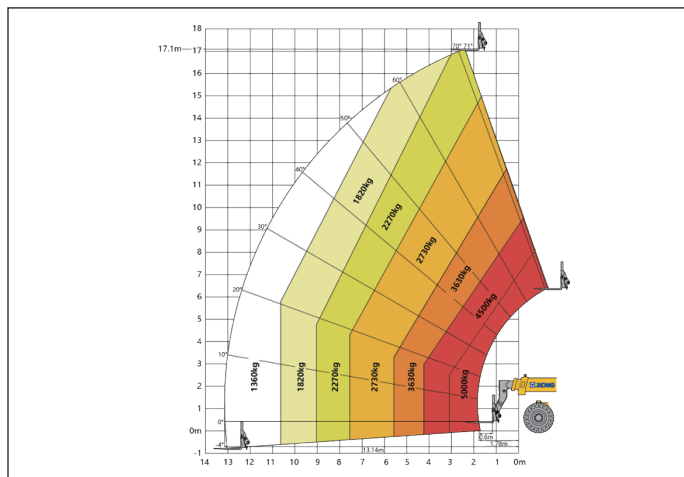


XT5017K

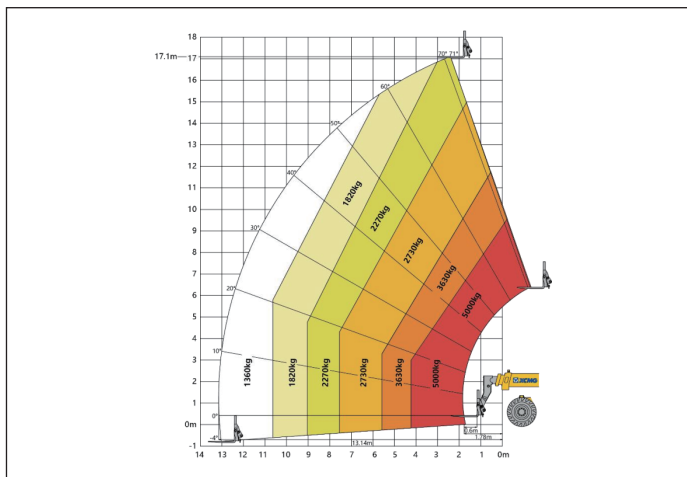


XT5517K

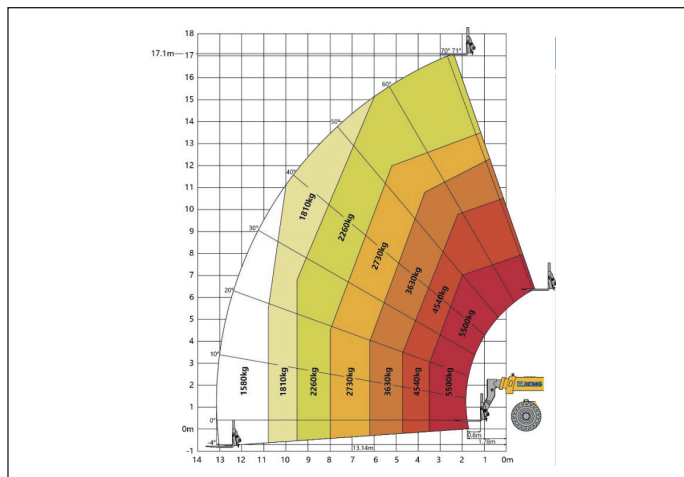

XT8010K

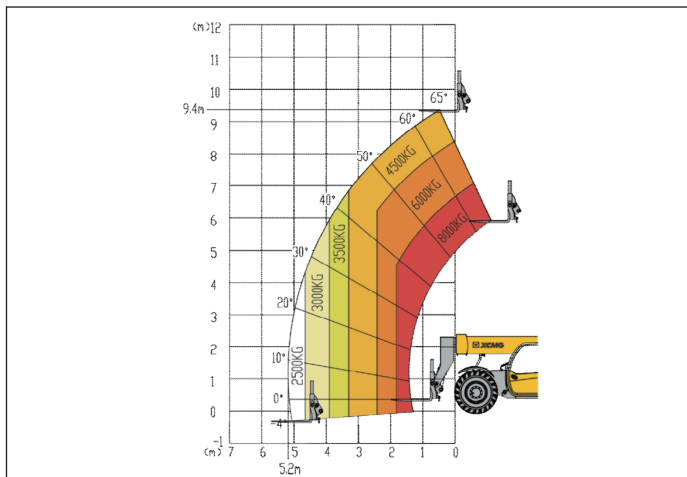


XT12010K



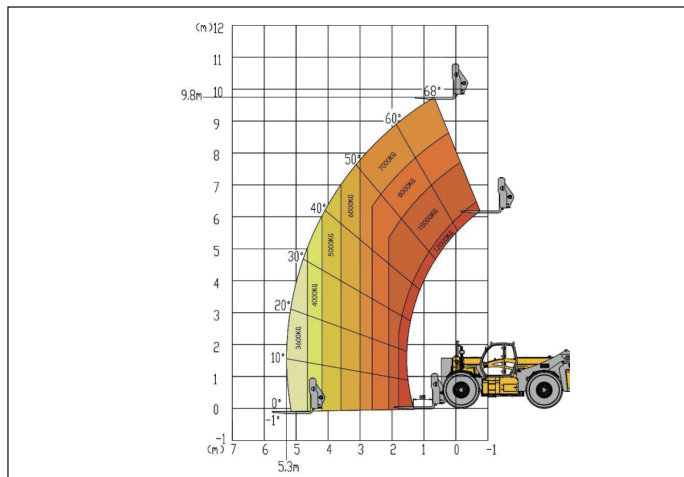


RANGE OF MOTION WITH STABILIZERS UP

XT18010K

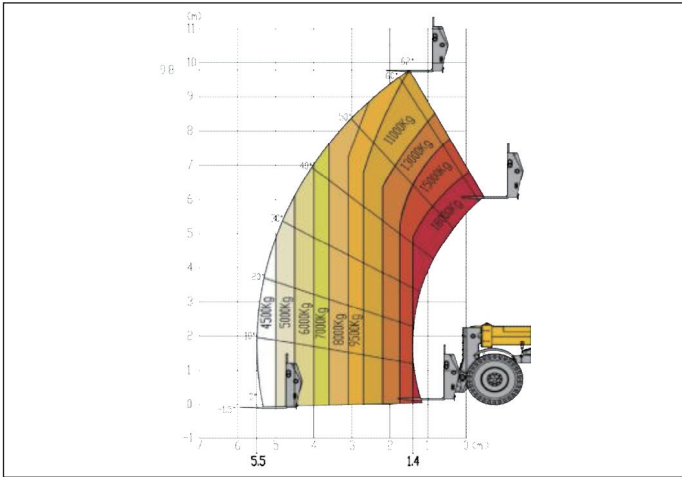

XT23010K

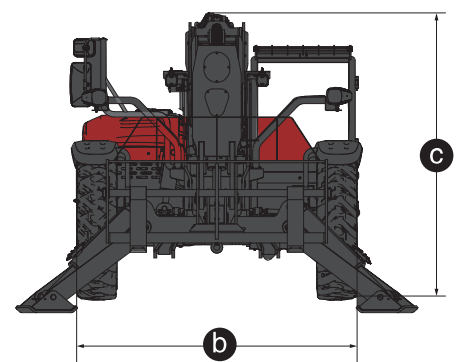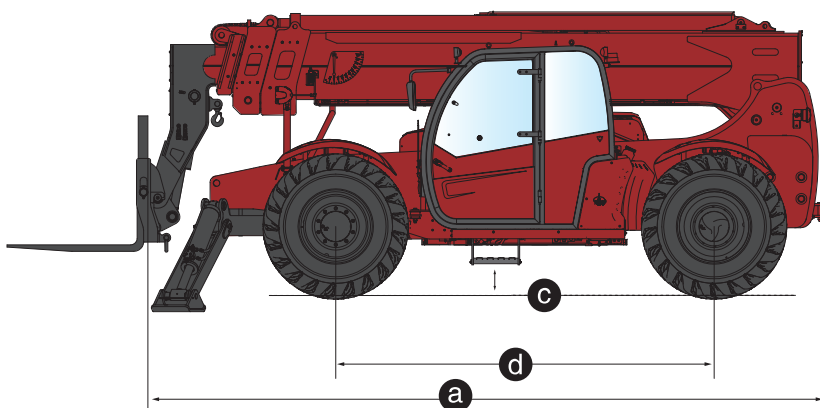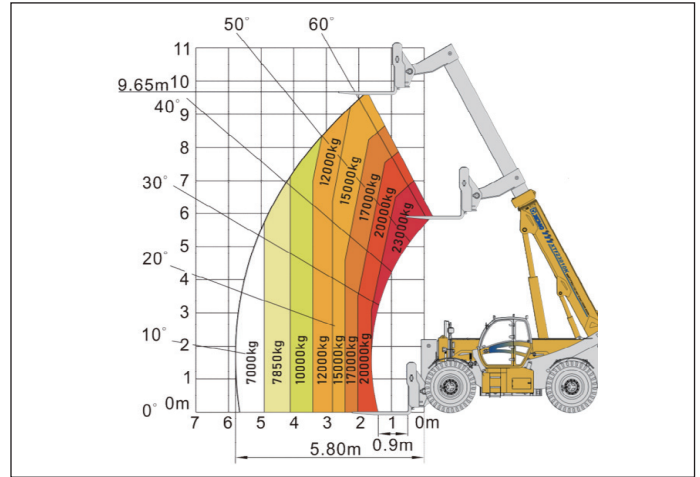

AVAILABLE ATTACHMENTS INCLUDE BUT NOT LIMITED TO THE FOLLOWING

Hook / Forks / Winch / Bucket / Basket / Log clamp / Work platform / Cylinder clamp / Clamp / Mechanical arm